

Aslon® Canted section

Material composition

Recycled granulate bound using a PU binding agent.


Sizes

1.000 x 100 x 20 mm
 1.000 x 200 x 30 mm
 1.000 x 200 x 43 mm
 See page 2 for more information

Sizetolerance

±5%

Colours:



Black

Density

1.000 kg/m³

Granulate

Extra fine 0,7 - 1 mm
 Fine 0,7 - 2 mm
 Standard 1-3 mm

Fire resistance

Efl to EN 13501

Smoke resistance

S2

Warranty

3 year guarantee for wear-resistance, when used correctly



EASY TO
INSTALL



ANTI-SLIP




EASY TO
CLEAN



Subject to change. This release replaces all previous versions. Version: 01-01-2025



SIZING

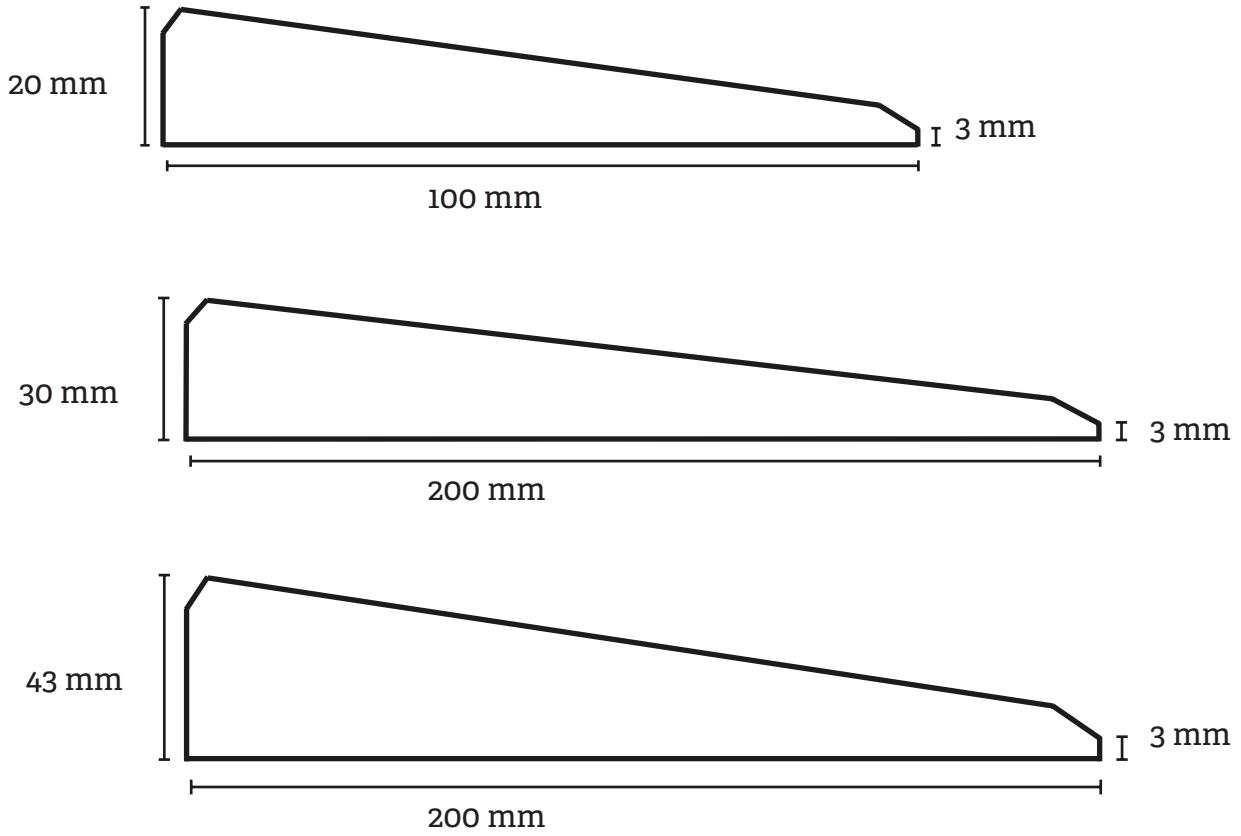

Subject to change. This release replaces all previous versions. Version: 01-01-2025