

Aslon® EpdmFIT

Material composition

SBR bound with PU binder and a top layer of approx. 5 mm PU-bonded EPDM rubber.

Sizes

Sizes: 500 x 500 mm | 1.000 x 1.000 mm


Thickness: flat > 15 mm | 20 mm
with studs > 30 mm | 40 mm | 45 mm

Sizetolerance

±2%

±5%

Colours

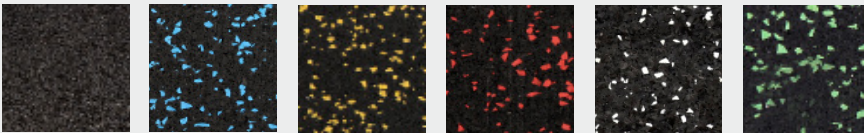

Black

Black with 10% EPDM | 100% EPDM in various colours
> other colours on request

Density

800 kg/m³

Granulate

Standard 1 - 3 mm

Extra fine > 0,7 - 1 mm

Fire resistance

Cfl to EN 13501

Smoke resistance

S1

Insolation value

Rd 0,15 EN 13165 | U 3,13 EN 6946

Noise reduction

ΔLw 25 DB EN 10140-1

Garantee

3 year guarantee for wear-resistance, when used at gyms.
The guarantee does not apply to colour.



MULTIPLE
COLORS



VERY
DURABLE



SOUND
ABSORBING

