

# Aslon® RubberrollFIT

## Material composition


Recycled granulate bound using a PU binding agent and possibly a colouring agent.

## Sizes

Sizes: 1.000 mm | 1.250 mm  
 Thickness: 3 - 10 mm

Sizetolerance  
 ±2%  
 ±5%

## Colour

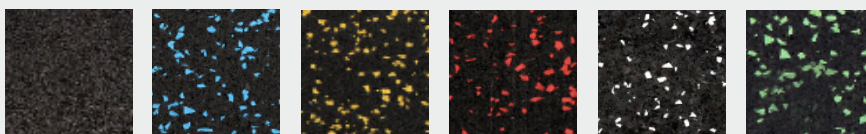

Black      Black with 10% EPDM | 100% EPDM in various colors

|                         |   |
|-------------------------|---|
| <b>Density</b>          | 730 kg/m <sup>3</sup>   930 kg/m <sup>3</sup>   1.100 kg/m <sup>3</sup> |
| <b>Fire resistance</b>  | Efl to EN 13501   |
| <b>Smoke resistance</b> | S2  |
| <b>Noise reduction</b>  | ΔLw 25 DB   |

## Guarantee

3 year guarantee for wear-resistance, when used at gyms.  
 The guarantee does not apply to colour.



EASY TO INSTALL



SHOCK ABSORBING



EASY TO CLEAN



Subject to change. This release replaces all previous versions. Version: 01-01-2025

